

# INITIAL STATIC VERTICAL PILE LOAD TEST ON 900MM DIA PILE

FOR BDD Chawls Redevelopment Project, Worli, Mumbai  
AT Building-3 Wing B

(TEST PILE TP-01)



**Client:** Tata Project  
**Contractor:** NA  
**Test Date:** 08 December 2025  
**Report No:** IVPLT-001

**Test conducted as per IS 2911 (Part 4) - 2013**

---

## CONTENTS

### 1.0 General

---

### 2.0 Scope of Work

---

### 3.0 Methodology

---

### 4.0 Results

---

### 5.0 Readings and Graph

---

### 6.0 Conclusion

---

### 7.0 Load Test Data

---

### 8.0 Site Images

---

### 9.0 Field Readings

---

### 10.0 Calibration Certificates

---



## 1.0 General

---

1.1 Tata Project decided to carry out static pile testing work on 900mm diameter pile to estimate load carrying capacity in vertical direction and settlement. This is the Initial Vertical Pile Load Test at Building-3 Wing B.

1.2 This report covers data for one vertical pile load test. This report covers calculation of safe load capacity for pile based on data collected during fieldwork.

1.3 The following codes of practices have been adopted:

- IS 2911 (Part 4) - 2013 "Code of Practice for Design and Construction of Pile Foundations - Load Tests on Piles"
- IS 14593 - 1998 (Reaffirmed 2003) "Design and Construction of Bored Cast-in-Situ Piles Founded on Rocks – Guidelines"

08 December 2025

IVPLT Report - TP-01

## 2.0 Scope of Work

---

Pile details are tabulated as below.

### 2.1 Pile Details for Initial Pile (Vertical Load Test)

|                                |                          |
|--------------------------------|--------------------------|
| Location                       | <b>Building-3 Wing B</b> |
| Pile ID                        | <b>TP-01</b>             |
| Pile Diameter                  | <b>900 mm</b>            |
| Pile Depth                     | <b>11.51 m</b>           |
| Concrete Grade                 | <b>M40</b>               |
| Maximum Vertical Safe Capacity | <b>420 MT</b>            |

### 2.2 Vertical Test Load for Initial Pile

The design vertical load on the pile is **420 MT**.

The pile is required to be tested to a load of **1050 MT** ( $2.5 \times$  design load).

### 2.3 Equipment Details

|                        |                                   |
|------------------------|-----------------------------------|
| Hydraulic Jack         | <b>As per site specifications</b> |
| Ram Area               | <b>2551 cm<sup>2</sup></b>        |
| Dial Gauge Least Count | <b>0.01 mm</b>                    |

## 3.0 Methodology

---

The Initial Vertical Pile Load Test was conducted in accordance with IS 2911 (Part 4) - 2013 "Code of Practice for Design and Construction of Pile Foundations - Load Test on Piles".

### 3.1 Test Setup

A hydraulic jack of adequate capacity was used to apply the load, reacting against a sturdy reaction frame. Four dial gauges (0.01 mm least count) were fixed on the pile head to record settlements.

### 3.2 Test Procedure

1. Load was applied in increments of approximately 20% of design load (84.0 MT) up to the test load of 1050 MT.
2. Each load increment was maintained until the rate of settlement was less than 0.1mm/hour, or for a minimum of 1 hour.
3. Maximum load was maintained for 24 hours as per IS 2911 requirements for initial tests.
4. Load was released in the same increments as the loading phase.
5. Settlement readings were recorded at each load increment using four dial gauges positioned at 90° intervals.

### 3.3 Acceptance Criteria (IS 2911 Part 4)

As per IS 2911 (Part 4) - 2013, the acceptance criteria for Initial Vertical Pile Load Test are:

1. Net settlement at design load shall not exceed 12mm or 2% of pile diameter (18.0mm), whichever is less.
2. Safe load shall be taken as two-thirds of the load at which total settlement equals 12mm.
3. Safe load shall not exceed half the load at which total settlement equals 10% of pile diameter (90.0mm).

08 December 2025

IVPLT Report - TP-01

### 3.4 Load Increment Summary

Jack Ram Area: **2551 cm<sup>2</sup>**

Design Load: **420 MT**

Test Load (2.5× Design): **1050 MT**

Load Increment (20% of Design): **84.0 MT**

*Note: As the least count of the pressure gauge is limited, exact incremental loads may not be attained. Hence, values close to the incremental load are considered.*

#### Table 1 – Load Sequence

The sequence of loading and unloading shall be as described below for **IVPLT on 900mm Dia Pile (420 MT Design Load)**.

| SR. NO.       | PRESSURE (KG/CM <sup>2</sup> ) | LOAD (MT) | READING TIME           |
|---------------|--------------------------------|-----------|------------------------|
| LOADING PHASE |                                |           |                        |
| 1             | 0                              | 0.00      | 0                      |
| 2             | 33                             | 84.00     | 1, 15, 30, 45, 60 mins |
| 3             | 66                             | 168.00    | 1, 15, 30, 45, 60 mins |
| 4             | 99                             | 252.00    | 1, 15, 30, 45, 60 mins |
| 5             | 132                            | 336.00    | 1, 15, 30, 45, 60 mins |
| 6             | 165                            | 420.00    | 1, 15, 30, 45, 60 mins |
| 7             | 198                            | 504.00    | 1, 15, 30, 45, 60 mins |
| 8             | 230                            | 588.00    | 1, 15, 30, 45, 60 mins |
| 9             | 263                            | 672.00    | 1, 15, 30, 45, 60 mins |
| 10            | 296                            | 756.00    | 1, 15, 30, 45, 60 mins |
| 11            | 329                            | 840.00    | 1, 15, 30, 45, 60 mins |
| 12            | 362                            | 924.00    | 1, 15, 30, 45, 60 mins |
| 13            | 395                            | 1008.00   | 1, 15, 30, 45, 60 mins |

| SR. NO.         | PRESSURE (KG/CM <sup>2</sup> ) | LOAD (MT) | READING TIME         |
|-----------------|--------------------------------|-----------|----------------------|
| 14              | 412                            | 1050.00   | 24 hours (1440 mins) |
| UNLOADING PHASE |                                |           |                      |
| 15              | 379                            | 966.00    | 1, 5, 15 mins        |
| 16              | 346                            | 882.00    | 1, 5, 15 mins        |
| 17              | 313                            | 798.00    | 1, 5, 15 mins        |
| 18              | 280                            | 714.00    | 1, 5, 15 mins        |
| 19              | 247                            | 630.00    | 1, 5, 15 mins        |
| 20              | 214                            | 546.00    | 1, 5, 15 mins        |
| 21              | 181                            | 462.00    | 1, 5, 15 mins        |
| 22              | 148                            | 378.00    | 1, 5, 15 mins        |
| 23              | 115                            | 294.00    | 1, 5, 15 mins        |
| 24              | 82                             | 210.00    | 1, 5, 15 mins        |
| 25              | 49                             | 126.00    | 1, 5, 15 mins        |
| 26              | 16                             | 42.00     | 1, 5, 15 mins        |
| 27              | 0                              | 0.00      | 1, 5, 15 mins        |

08 December 2025

IVPLT Report - TP-01

## 4.0 Results

---

### 4.1 Test Results Summary

|                                |                 |
|--------------------------------|-----------------|
| Maximum Settlement Recorded    | <b>7.22 mm</b>  |
| Elastic Rebound                | <b>3.08 mm</b>  |
| Net Settlement (Max - Rebound) | <b>4.14 mm</b>  |
| Settlement Limit (IS 2911)     | <b>12 mm</b>    |
| Safe Load Adopted              | <b>420.0 MT</b> |
| Governing Criterion            | <b>DESIGN</b>   |
| Test Status                    | <b>PASSED</b>   |


### 4.2 Assessment

The net settlement of 4.14 mm is within the permissible limit of 12 mm as per IS 2911 (Part 4) - 2013.

The safe load adopted for the pile is **420.0 MT** based on the design criterion.



5.0 Load vs Settlement Curve

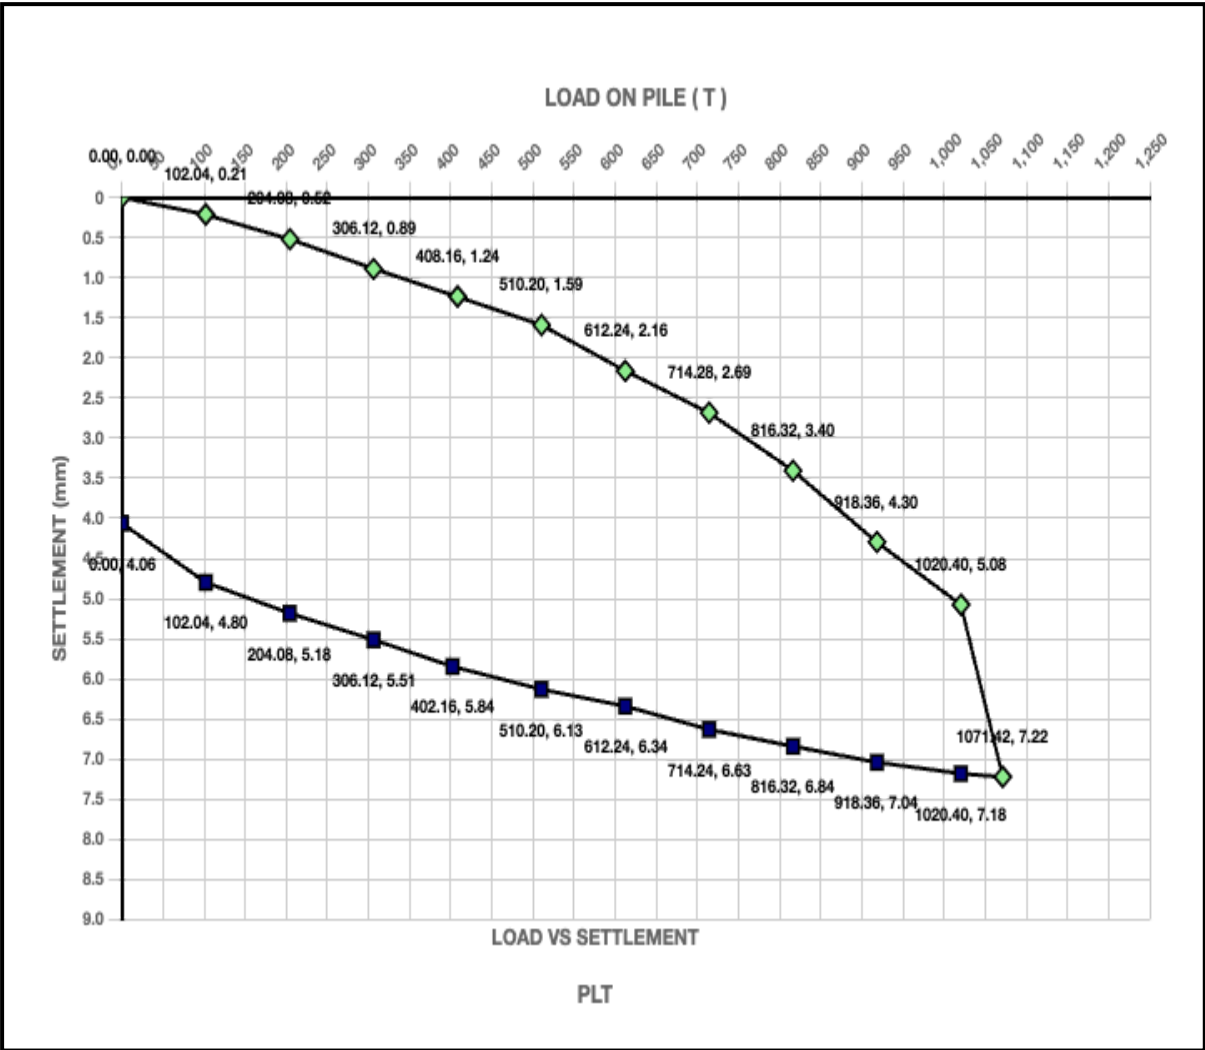

Maximum Settlement at 1071.42 T: 7.22 mm

|           |                |                |               |
|-----------|----------------|----------------|---------------|
| TEST LOAD | MAX SETTLEMENT | NET SETTLEMENT | TOTAL REBOUND |
| 1050.0    | 7.22           | 4.14           | 3.08          |
| MT        | mm             | mm             | mm            |

TEST PASSED ✓

Net settlement 4.14mm is within the 12mm limit (IS 2911 Part 4)

08 December 2025

IVPLT Report - TP-01

## 6.0 Conclusion

---

Based on the Initial Vertical Pile Load Test conducted on pile TP-01 at Building-3 Wing B, the following observations and conclusions are drawn:

1. The pile was loaded up to 1050.0 MT (2.5 times the design load of 420 MT) as per IS 2911 (Part 4) - 2013.
2. The maximum settlement recorded at test load was 7.22 mm.
3. After complete unloading, the elastic rebound was 3.08 mm.
4. The net settlement (residual) is 4.14 mm, which is within the permissible limit of 12 mm.
5. The safe load adopted for the pile is 420.0 MT based on the design criterion.
6. **The pile HAS PASSED the Initial Vertical Pile Load Test as per IS 2911 (Part 4) - 2013.**

Therefore, the design safe load of 420 MT can be adopted as the working load capacity for this pile.

08 December 2025

IVPLT Report - TP-01

## 7.0 Load Test Data

| S.NO | PHASE   | LOAD (MT) | SETTLEMENT (MM) | SIGNATURE |
|------|---------|-----------|-----------------|-----------|
| 1    | LOADING | 0.00      | 0.00            |           |
| 2    | LOADING | 102.04    | 0.06            |           |
| 3    | LOADING | 102.04    | 0.13            |           |
| 4    | LOADING | 102.04    | 0.17            |           |
| 5    | LOADING | 102.04    | 0.19            |           |
| 6    | LOADING | 102.04    | 0.21            |           |
| 7    | LOADING | 204.08    | 0.41            |           |
| 8    | LOADING | 204.08    | 0.29            |           |
| 9    | LOADING | 204.08    | 0.43            |           |
| 10   | LOADING | 204.08    | 0.47            |           |
| 11   | LOADING | 204.08    | 0.52            |           |
| 12   | LOADING | 306.12    | 0.77            |           |
| 13   | LOADING | 306.12    | 0.81            |           |
| 14   | LOADING | 306.12    | 0.83            |           |
| 15   | LOADING | 306.12    | 0.86            |           |
| 16   | LOADING | 306.12    | 0.89            |           |
| 17   | LOADING | 408.16    | 1.25            |           |
| 18   | LOADING | 408.16    | 1.28            |           |
| 19   | LOADING | 408.16    | 1.31            |           |
| 20   | LOADING | 408.16    | 1.08            |           |
| 21   | LOADING | 408.16    | 1.24            |           |
| 22   | LOADING | 510.20    | 1.51            |           |
| 23   | LOADING | 510.20    | 1.50            |           |
| 24   | LOADING | 510.20    | 1.53            |           |
| 25   | LOADING | 510.20    | 1.56            |           |

| S.NO | PHASE   | LOAD (MT) | SETTLEMENT (MM) | SIGNATURE |
|------|---------|-----------|-----------------|-----------|
| 26   | LOADING | 510.20    | 1.59            |           |
| 27   | LOADING | 612.24    | 2.08            |           |
| 28   | LOADING | 612.24    | 2.11            |           |
| 29   | LOADING | 612.24    | 2.13            |           |
| 30   | LOADING | 612.24    | 2.13            |           |
| 31   | LOADING | 612.24    | 2.16            |           |
| 32   | LOADING | 714.28    | 2.65            |           |
| 33   | LOADING | 714.28    | 2.65            |           |
| 34   | LOADING | 714.28    | 2.67            |           |
| 35   | LOADING | 714.28    | 2.68            |           |
| 36   | LOADING | 714.28    | 2.69            |           |
| 37   | LOADING | 816.32    | 3.30            |           |
| 38   | LOADING | 816.32    | 3.33            |           |
| 39   | LOADING | 816.32    | 3.35            |           |
| 40   | LOADING | 816.32    | 3.38            |           |
| 41   | LOADING | 816.32    | 3.40            |           |
| 42   | LOADING | 918.36    | 4.18            |           |
| 43   | LOADING | 918.36    | 4.20            |           |
| 44   | LOADING | 918.36    | 4.23            |           |
| 45   | LOADING | 918.36    | 4.27            |           |
| 46   | LOADING | 918.36    | 4.30            |           |
| 47   | LOADING | 1020.40   | 4.95            |           |
| 48   | LOADING | 1020.40   | 5.00            |           |
| 49   | LOADING | 1020.40   | 5.03            |           |
| 50   | LOADING | 1020.40   | 5.06            |           |
| 51   | LOADING | 1020.40   | 5.08            |           |
| 52   | LOADING | 1071.42   | 5.36            |           |
| 53   | HOLD    | 1071.42   | 5.40            |           |

| S.NO | PHASE     | LOAD (MT) | SETTLEMENT (MM) | SIGNATURE |
|------|-----------|-----------|-----------------|-----------|
| 54   | HOLD      | 1071.42   | 5.44            |           |
| 55   | HOLD      | 1071.42   | 5.50            |           |
| 56   | HOLD      | 1071.42   | 5.53            |           |
| 57   | HOLD      | 1071.42   | 5.58            |           |
| 58   | HOLD      | 1071.42   | 5.60            |           |
| 59   | HOLD      | 1071.42   | 5.62            |           |
| 60   | HOLD      | 1071.42   | 5.66            |           |
| 61   | HOLD      | 1071.42   | 5.67            |           |
| 62   | HOLD      | 1071.42   | 5.68            |           |
| 63   | HOLD      | 1071.42   | 5.74            |           |
| 64   | HOLD      | 1071.42   | 5.79            |           |
| 65   | HOLD      | 1071.42   | 6.14            |           |
| 66   | HOLD      | 1071.42   | 6.63            |           |
| 67   | HOLD      | 1071.42   | 6.86            |           |
| 68   | HOLD      | 1071.42   | 6.95            |           |
| 69   | HOLD      | 1071.42   | 7.00            |           |
| 70   | HOLD      | 1071.42   | 7.12            |           |
| 71   | HOLD      | 1071.42   | 7.17            |           |
| 72   | HOLD      | 1071.42   | 7.19            |           |
| 73   | HOLD      | 1071.42   | 7.21            |           |
| 74   | HOLD      | 1071.42   | 7.22            |           |
| 75   | HOLD      | 1071.42   | 7.22            |           |
| 76   | HOLD      | 1071.42   | 7.22            |           |
| 77   | UNLOADING | 1020.40   | 7.18            |           |
| 78   | UNLOADING | 1020.40   | 7.18            |           |
| 79   | UNLOADING | 1020.40   | 7.18            |           |
| 80   | UNLOADING | 918.36    | 7.08            |           |
| 81   | UNLOADING | 918.36    | 7.06            |           |

| S.NO | PHASE     | LOAD (MT) | SETTLEMENT (MM) | SIGNATURE |
|------|-----------|-----------|-----------------|-----------|
| 82   | UNLOADING | 918.36    | 7.04            |           |
| 83   | UNLOADING | 816.32    | 6.87            |           |
| 84   | UNLOADING | 816.32    | 6.84            |           |
| 85   | UNLOADING | 816.32    | 6.84            |           |
| 86   | UNLOADING | 714.24    | 6.66            |           |
| 87   | UNLOADING | 714.24    | 6.64            |           |
| 88   | UNLOADING | 714.24    | 6.63            |           |
| 89   | UNLOADING | 612.24    | 6.41            |           |
| 90   | UNLOADING | 612.24    | 6.37            |           |
| 91   | UNLOADING | 612.24    | 6.34            |           |
| 92   | UNLOADING | 510.20    | 6.14            |           |
| 93   | UNLOADING | 510.20    | 6.13            |           |
| 94   | UNLOADING | 510.20    | 6.13            |           |
| 95   | UNLOADING | 402.16    | 5.89            |           |
| 96   | UNLOADING | 402.16    | 5.87            |           |
| 97   | UNLOADING | 402.16    | 5.84            |           |
| 98   | UNLOADING | 306.12    | 5.58            |           |
| 99   | UNLOADING | 306.12    | 5.54            |           |
| 100  | UNLOADING | 306.12    | 5.51            |           |
| 101  | UNLOADING | 204.08    | 5.25            |           |
| 102  | UNLOADING | 204.08    | 5.21            |           |
| 103  | UNLOADING | 204.08    | 5.18            |           |
| 104  | UNLOADING | 102.04    | 4.89            |           |
| 105  | UNLOADING | 102.04    | 4.82            |           |
| 106  | UNLOADING | 102.04    | 4.80            |           |
| 107  | UNLOADING | 0.00      | 4.14            |           |
| 108  | UNLOADING | 0.00      | 4.11            |           |
| 109  | UNLOADING | 0.00      | 4.06            |           |





08 December 2025

IVPLT Report - TP-01

## 8.0 Site Images



## 9.0 Field Readings

---

This section contains the original field recording sheets that were used to record the test data during execution. These scanned documents serve as supporting evidence for the test results presented in this report.

08 December 2025

IVPLT Report - TP-01

---

## **10.0 Calibration Certificates**

---

This section contains the calibration certificates for the equipment used during the pile load test. These certificates verify that all measuring instruments were properly calibrated and meet the required standards.

08 December 2025

IVPLT Report - TP-01

---

Prepared by:

Checked by:

---

Site Engineer

---

Quality Engineer

Reviewed by:


Approved by:

---

Project Manager

---

Client Representative

**ZedGeo Systems Private Limited., Mumbai**RECORD OF PILE LOAD TEST NO. **P395 8/01**PROJECT:- **CP10-C5-EV03**LOCATION:- **Kalyambedu**CLIENTS NAME:- **CMRL**CONSULTANT:- **NKRB**CONTRACTOR:- **LST**

PMC:-

L.C OF DIAL GAUGE:- **0.01 mm**TYPE OF TEST:- **RVPLT**DESIGN LOAD:- **550 mt**TEST LOAD:- **825 mt**MIXED DESIGN:- **m-35**PILE DIAMETER:- **1200 mm**PAGE:- **05**RAM AREA:- **2551 cm<sup>2</sup>**DATE OF CASTING:- **12/03/23**PILE DEPTH:- **38.893 mtr****INITIAL PILE LOAD TEST**

| DATE     | TIME  | PRESSURE                         | LOAD IN MT | Reading                    |           |           |           | Average settlement | SIGNATURE |       |         | REMARK |
|----------|-------|----------------------------------|------------|----------------------------|-----------|-----------|-----------|--------------------|-----------|-------|---------|--------|
|          | (Hrs) | GAUGE READING kg/cm <sup>2</sup> |            | Reading 1                  | Reading 2 | Reading 3 | Reading 4 | Test Pile          | ZED       | LST   | NKRB    |        |
| 25/09/24 | 00.41 | 320                              | 799.99     | 2.73                       | 3.40      | 4.58      | 4.60      | 3.82               | Asahani   | C. Pr | Asahani |        |
|          | 00.45 |                                  |            | 2.73                       | 3.40      | 4.58      | 4.60      | 3.82               | Asahani   | C. Pr | Asahani |        |
|          | 00.46 | 280                              | 699.99     | 2.72                       | 3.39      | 4.57      | 4.60      | 3.82               | Asahani   | C. Pr | Asahani |        |
|          | 00.50 |                                  |            | 2.72                       | 3.39      | 4.57      | 4.60      | 3.82               | Asahani   | C. Pr | Asahani |        |
|          | 00.51 | 240                              | 600        | 2.70                       | 3.34      | 4.56      | 4.59      | 3.79               | Asahani   | C. Pr | Asahani |        |
|          | 00.55 |                                  |            | 2.70                       | 3.34      | 4.56      | 4.59      | 3.79               | Asahani   | C. Pr | Asahani |        |
|          | 00.56 | 200                              | 500        | 2.47                       | 3.09      | 4.22      | 4.28      | 3.51               | Asahani   | C. Pr | Asahani |        |
|          | 1.00  |                                  |            | 2.47                       | 3.09      | 4.22      | 4.28      | 3.51               | Asahani   | C. Pr | Asahani |        |
|          | 1.01  | 160                              | 400        | 2.29                       | 2.84      | 3.93      | 4.03      | 3.27               | Asahani   | C. Pr | Asahani |        |
|          | 1.05  |                                  |            | 2.29                       | 2.84      | 3.93      | 4.03      | 3.27               | Asahani   | C. Pr | Asahani |        |
|          | 1.06  | 120                              | 300        | 2.05                       | 2.50      | 3.58      | 3.71      | 2.96               | Asahani   | C. Pr | Asahani |        |
|          | 1.10  |                                  |            | 2.05                       | 2.50      | 3.58      | 3.71      | 2.96               | Asahani   | C. Pr | Asahani |        |
|          | 1.11  | 80                               | 200        | 1.81                       | 2.20      | 3.23      | 3.39      | 2.65               | Asahani   | C. Pr | Asahani |        |
|          | 1.15  |                                  |            | 1.81                       | 2.20      | 3.23      | 3.39      | 2.65               | Asahani   | C. Pr | Asahani |        |
|          | 1.16  | 40                               | 100        | 1.30                       | 1.84      | 2.88      | 2.97      | 2.24               | Asahani   | C. Pr | Asahani |        |
|          | 1.20  |                                  |            | 1.30                       | 1.84      | 2.88      | 2.97      | 2.24               | Asahani   | C. Pr | Asahani |        |
|          | 2.21  | 0                                | 0.0        | 0.98                       | 1.41      | 2.25      | 2.49      | 1.78               | Asahani   | C. Pr | Asahani |        |
|          | 2.25  |                                  |            | 0.98                       | 1.41      | 2.25      | 2.45      | 1.78               | Asahani   | C. Pr | Asahani |        |
|          |       |                                  |            | Total Settlement = 3.83 mm |           |           |           |                    |           |       |         |        |
|          |       |                                  |            | Net Settlement = 1.78 mm   |           |           |           |                    |           |       |         |        |

Rebound 2.25 mm

ZED  
Asahani  
25/09/24

Asahani  
25/09/24



**ZedGeo Systems Private Limited., Mumbai**

RECORD OF PILE LOAD TEST NO.:

PROJECT:-

LOCATION:-

CLIENTS NAME:- CMRL

CONSULTANT:- NKAIB

CONTRACTOR:- LBT

PMC:-

LC OF DIAL GAUGE:- 0.01mm

TYPE OF TEST:- RVPLT

DESIGN LOAD:- 550 MT

TEST LOAD:- 825 MT

MIXED DESIGN:-

PILE DIAMETER:- M-35

1250mm

RAM AREA:-

DATE OF CASTING:-

PILE DEPTH:-

PAGE:- 03

2551 cm<sup>2</sup>

12/03/24

38.89 m

## INITIAL PILE LOAD TEST

| DATE | TIME  | PRESSURE                         | LOAD IN MT | Reading   |           |           |           | Average settlement | SIGNATURE |       |       | REMARK               |
|------|-------|----------------------------------|------------|-----------|-----------|-----------|-----------|--------------------|-----------|-------|-------|----------------------|
|      | (Hrs) | GAUGE READING kg/cm <sup>2</sup> |            | Reading 1 | Reading 2 | Reading 3 | Reading 4 | Test Pile          | ZED       | LBT   | NKAIB |                      |
|      | 00:41 | 330                              | 894.99     | 1.81      | 2.50      | 3.35      | 3.50      | 2.79               | AK        | AK    | AK    | (Holding for 24 Hrs) |
|      | 00:55 |                                  |            | 1.90      | 2.59      | 3.40      | 3.59      | 2.83               | AK        | AK    | AK    |                      |
|      | 01:10 |                                  |            | 1.91      | 2.59      | 3.41      | 3.53      | 2.84               | AK        | AK    | AK    |                      |
|      | 01:15 |                                  |            | 1.91      | 2.52      | 3.41      | 3.53      | 2.84               | AK        | AK    | AK    |                      |
|      | 01:40 |                                  |            | 1.91      | 2.59      | 3.41      | 3.53      | 2.84               | AK        | AK    | AK    |                      |
|      | 02:40 |                                  |            | 1.91      | 2.59      | 3.41      | 3.53      | 2.84               | AK        | AK    | AK    |                      |
|      | 03:40 |                                  |            | 2.01      | 2.65      | 3.50      | 3.69      | 2.98               | AK        | C. P. | AK    |                      |
|      | 04:40 |                                  |            | 2.22      | 2.74      | 3.73      | 3.89      | 3.19               | AK        | C. P. | AK    |                      |
|      | 05:40 |                                  |            | 2.34      | 2.94      | 3.91      | 3.95      | 3.28               | Asghari   | C. P. | AK    |                      |
|      | 06:40 |                                  |            | 2.43      | 3.03      | 4.01      | 4.05      | 3.38               | Asghari   | C. P. | AK    |                      |
|      | 07:40 |                                  |            | 2.81      | 3.44      | 4.60      | 4.62      | 3.86               | Asghari   | C. P. | AK    |                      |
|      | 08:40 |                                  |            | 2.86      | 3.50      | 4.71      | 4.73      | 3.95               | Asghari   | S. J. | AK    | (Kaithik on K)       |
|      | 09:40 |                                  |            | 3.32      | 3.97      | 5.16      | 5.15      | 4.4                | Asghari   | S. J. | AK    |                      |
|      | 10:40 |                                  |            | 3.50      | 4.14      | 5.26      | 5.27      | 4.54               | Asghari   | S. J. | AK    |                      |
|      | 11:40 |                                  |            | 3.70      | 4.36      | 5.43      | 5.43      | 4.73               | Asghari   | S. J. | AK    |                      |
|      | 12:40 |                                  |            | 3.64      | 4.31      | 5.32      | 5.34      | 4.65               | Asghari   | S. J. | AK    | (W. M. - W. S.)      |
|      | 13:40 |                                  |            | 3.68      | 4.35      | 5.34      | 5.37      | 4.68               | Asghari   | S. J. | AK    |                      |
|      | 14:40 |                                  |            | 3.64      | 4.31      | 5.29      | 5.29      | 4.63               | Asghari   | S. J. | AK    |                      |
|      | 15:40 |                                  |            | 3.27      | 3.94      | 5.00      | 5.02      | 4.30               | Asghari   | S. J. | AK    |                      |
|      | 16:40 |                                  |            | 2.84      | 3.49      | 4.65      | 4.68      | 3.91               | Asghari   | S. J. | AK    |                      |
|      | 17:40 |                                  |            | 2.68      | 3.33      | 4.51      | 4.53      | 3.76               | Asghari   | S. J. | AK    |                      |
|      | 18:40 |                                  |            | 2.75      | 3.41      | 4.57      | 4.58      | 3.82               | Asghari   | S. J. | AK    |                      |
|      | 19:40 |                                  |            | 2.78      | 3.44      | 4.59      | 4.59      | 3.85               | Asghari   | S. J. | AK    |                      |

**ZedGeo Systems Private Limited., Mumbai**

RECORD OF PILE LOAD TEST NO.- P39SB/01  
PROJECT:- CPOCS - EV03  
LOCATION:-  
CLIENTS NAME:- CMRL  
CONSULTANT:- NKAB  
CONTRACTOR:- L&T  
PMC:-

LC OF DIAL GAUGE:- 0.01 mm  
TYPE OF TEST:- RVPLT  
DESIGN LOAD:- 550 MT  
TEST LOAD:- 825 MT  
MIXED DESIGN:-  
PILE DIAMETER:- M-35  
1200 mm

PAGE:- 02  
RAM AREA:- 2551 cm<sup>2</sup>  
DATE OF CASTING:- 12/03/23  
PILE DEPTH:- 38.093 mtr

**INITIAL PILE LOAD TEST**

| DATE     | TIME  | PRESSURE           | LOAD IN MT | Reading   |           |           |           | Average settlement | SIGNATURE |     |      | REMARK |
|----------|-------|--------------------|------------|-----------|-----------|-----------|-----------|--------------------|-----------|-----|------|--------|
|          | (Hrs) | kg/cm <sup>2</sup> |            | Reading 1 | Reading 2 | Reading 3 | Reading 4 | Test Pile          | ZED       | L&T | NKAB |        |
| 20/09/23 |       |                    |            |           |           |           |           |                    |           |     |      |        |
|          | 20:4  | 200                | 500        | 0.87      | 1.20      | 1.66      | 2.10      | 1.46               | OK        | Dr  | OK   |        |
|          | 20:55 |                    |            | 0.87      | 1.20      | 1.66      | 2.10      | 1.46               | OK        | Dr  | OK   |        |
|          | 21:10 |                    |            | 0.90      | 1.22      | 1.68      | 2.12      | 1.48               | OK        | Dr  | OK   |        |
|          | 21:25 |                    |            | 0.90      | 1.23      | 1.70      | 2.15      | 1.49               | OK        | Dr  | OK   |        |
|          | 21:40 |                    |            | 0.90      | 1.23      | 1.70      | 2.15      | 1.49               | OK        | Dr  | OK   |        |
|          | 21:4  | 240                | 600        | 1.22      | 1.65      | 2.22      | 2.70      | 1.95               | OK        | Dr  | OK   |        |
|          | 21:55 |                    |            | 1.22      | 1.62      | 2.23      | 2.71      | 1.95               | OK        | Dr  | OK   |        |
|          | 22:10 |                    |            | 1.24      | 1.64      | 2.25      | 2.72      | 1.97               | OK        | Dr  | OK   |        |
|          | 22:25 |                    |            | 1.25      | 1.66      | 2.27      | 2.74      | 1.99               | OK        | Dr  | OK   |        |
|          | 22:40 |                    |            | 1.27      | 1.69      | 2.30      | 2.76      | 2.00               | OK        | Dr  | OK   |        |
|          | 22:4  | 280                | 699.99     | 1.50      | 1.96      | 2.75      | 3.10      | 2.33               | OK        | Dr  | OK   |        |
|          | 22:55 |                    |            | 1.50      | 1.96      | 2.75      | 3.10      | 2.33               | OK        | Dr  | OK   |        |
|          | 23:10 |                    |            | 1.50      | 1.96      | 2.75      | 3.10      | 2.33               | OK        | Dr  | OK   |        |
|          | 23:25 |                    |            | 1.51      | 1.97      | 2.76      | 3.11      | 2.34               | OK        | Dr  | OK   |        |
|          | 23:40 |                    |            | 1.51      | 1.97      | 2.76      | 3.11      | 2.34               | OK        | Dr  | OK   |        |
|          | 23:4  | 320                | 799.99     | 1.70      | 2.35      | 3.25      | 3.40      | 2.67               | OK        | Dr  | OK   |        |
|          | 23:55 |                    |            | 1.71      | 2.36      | 3.26      | 3.41      | 2.68               | OK        | Dr  | OK   |        |
|          | 00:10 |                    |            | 1.71      | 2.36      | 3.26      | 3.41      | 2.68               | OK        | Dr  | OK   |        |
|          | 00:25 |                    |            | 1.71      | 2.36      | 3.26      | 3.41      | 2.68               | OK        | Dr  | OK   |        |
|          | 00:40 |                    |            | 1.71      | 2.36      | 3.26      | 3.41      | 2.68               | OK        | Dr  | OK   |        |



**ZedGeo Systems Private Limited., Mumbai**

RECORD OF PILE LOAD TEST NO:- P395, B/01

PROJECT:- CP10 - C5 - EV03

LOCATION:- KOYAMBEDU

CONTRACTOR:- L&amp;T

CLIENTS NAME:- NKAB (CMRL)

L.C OF DIAL GAUGE:- 0.01mm

Type of Test:- RUPLT

Design load on pile:- 550MT

Test Load:- 025 MT

Mixed Design:- m-35

Pile Diameter:- 1200mm

Page:- 01  
Ram Area:- 2931 cm<sup>2</sup>  
Date of Casting:- 12/03/2023  
Pile Depth:- 38.293 mtr

| ROUTINE INITIAL PILE LOAD TEST |       |                      |            |           |           |           |           |                    |           |     | REMARK |
|--------------------------------|-------|----------------------|------------|-----------|-----------|-----------|-----------|--------------------|-----------|-----|--------|
| DATE                           | TIME  | PRESSURE             | LOAD IN MT | Reading   |           |           |           | Average settlement | SIGNATURE |     |        |
|                                | (Hrs) | GAUGE READING kg/cm2 |            | Reading 1 | Reading 2 | Reading 3 | Reading 4 | Test Pile          | ZED       | LST | NKAB   |
| 23/09/24                       | 16:39 | 0                    | 0          | 0         | 0         | 0         | 0         | 0                  | DK.       | DK. | DK.    |
|                                | 16:40 | 40                   | 100        | 0.20      | 0.25      | 0.30      | 0.75      | 0.37               | DK.       | DK. | DK.    |
|                                | 16:55 |                      |            | 0.17      | 0.21      | 0.26      | 0.74      | 0.34               | DK.       | DK. | DK.    |
|                                | 17:10 |                      |            | 0.15      | 0.18      | 0.23      | 0.71      | 0.32               | DK.       | DK. | DK.    |
|                                | 17:25 |                      |            | 0.12      | 0.15      | 0.20      | 0.70      | 0.29               | DK.       | DK. | DK.    |
|                                | 17:40 |                      |            | 0.10      | 0.12      | 0.17      | 0.67      | 0.26               | DK.       | DK. | DK.    |
|                                | 17:41 | 80                   | 200        | 0.27      | 0.42      | 0.52      | 1.09      | 0.57               | DK.       | DK. | DK.    |
|                                | 17:55 |                      |            | 0.25      | 0.40      | 0.50      | 1.07      | 0.55               | DK.       | DK. | DK.    |
|                                | 18:10 |                      |            | 0.25      | 0.40      | 0.52      | 1.07      | 0.56               | DK.       | DK. | DK.    |
|                                | 18:25 |                      |            | 0.24      | 0.39      | 0.51      | 1.06      | 0.55               | DK.       | DK. | DK.    |
|                                | 18:40 |                      |            | 0.24      | 0.39      | 0.51      | 1.06      | 0.55               | DK.       | DK. | DK.    |
|                                | 18:41 | 120                  | 300        | 0.44      | 0.69      | 0.89      | 1.44      | 0.86               | DK.       | DK. | DK.    |
|                                | 18:55 |                      |            | 0.43      | 0.69      | 0.89      | 1.44      | 0.86               | DK.       | DK. | DK.    |
|                                | 19:10 |                      |            | 0.44      | 0.70      | 0.90      | 1.45      | 0.87               | DK.       | DK. | DK.    |
|                                | 19:25 |                      |            | 0.44      | 0.70      | 0.91      | 1.47      | 0.88               | DK.       | DK. | DK.    |
|                                | 19:40 |                      |            | 0.44      | 0.70      | 0.91      | 1.47      | 0.88               | DK.       | DK. | DK.    |
|                                | 19:41 | 160                  | 400        | 0.66      | 0.99      | 1.26      | 1.90      | 1.18               | DK.       | DK. | DK.    |
|                                | 19:55 |                      |            | 0.66      | 0.99      | 1.26      | 1.90      | 1.18               | DK.       | DK. | DK.    |
|                                | 20:10 |                      |            | 0.66      | 0.94      | 1.28      | 1.90      | 1.19               | DK.       | DK. | DK.    |
|                                | 20:25 |                      |            | 0.68      | 0.94      | 1.30      | 1.90      | 1.20               | DK.       | DK. | DK.    |
|                                | 20:40 |                      |            | 0.68      | 0.94      | 1.30      | 1.90      | 1.20               | DK.       | DK. | DK.    |

# Appointment Scheduler

[← Back to Appointment Scheduler \(/appointmentscheduler-appointment/ca/en\)](/appointmentscheduler-appointment/ca/en)

## ✓ Appointment Confirmation



Click here to print your appointment details

## Appointment Scheduler Details

USCIS HOUSTON SOUTHWEST (ASC):  
Houston, TX

9440 Highway 6 South  
Houston, TX 77083

**Date:** 07/01/2025

**Time:** 01:00 PM

**IRCC number:**  
1000025611458

### What you need to bring:

- ▶ **Biometrics letter** - Your Canadian biometrics instruction letter
- ▶ **Your passport or travel document** - The document used in your application

### Additional information:

- ▶ Print a copy of your appointment details if you want to bring it to your appointment
- ▶ All USCIS Application Support Centers are handicap accessible
- ▶ Bring a translator if you need help reading, speaking, or

## USCIS HOUSTON SOUTHWEST (ASC): Houston, TX

9440 Highway 6 South  
Houston, TX 77083

**Date:** 07/01/2025  
**Heure:** 01:00 PM  
**Numéro IRCC:**  
1000025611458

### Ce que vous devez apporter:

- ▶ **Lettre d'instructions pour la collecte de données biométriques**  
- Votre lettre d'instructions du Canada
- ▶ **Votre passeport ou document de voyage** - Le document utilisé dans votre demande

### Informations supplémentaires:

- ▶ Imprimez une copie des détails de votre rendez-vous si vous souhaitez l'apporter à votre rendez-vous
- ▶ Tous les centres d'aide à la demande sont accessibles aux personnes handicapées.
- ▶ Soyez accompagné(e) d'un(e) interprète si vous avez besoin d'aide pour lire, parler ou comprendre l'anglais

BDD Chawls Redevelopment Project, Worli, Mumbai

Details

Data Entry

Report

Initial Vertical Load Test Report

Pile ID: TP-01 | Location: Building-3 Wing B

Test Date: 08 December 2025 | Test Method: IS 2911 (Part 4) - 2013

Test Result: PASSED

Net Settlement: 4.14mm (Limit: 12mm)

PASSED

TEST LOAD

1050.0 MT

2.5× Design Load

MAX SETTLEMENT

7.22 mm

At test load

ELASTIC REBOUND

3.08 mm

Recovery after unloading

NET SETTLEMENT

4.14 mm

Limit: 12mm (IS 2911)

SAFE LOAD ADOPTED

420.0 MT

Per design criterion

DESIGN LOAD

420.0 MT

Working load capacity

Pile Specifications

Pile ID

TP-01

Diameter

900 mm

Depth

11.51 m

Concrete Grade

M40

Ram Area

2551 cm²

Jack Name

-

Dial Gauge LC

0.01 mm

Method

IS 2911 (Part 4)

Load vs Settlement Curve

Loading

Hold

Unloading

Settlement (mm)

0

1

2

3

4

5

6

7

8

0

200

400

https://pile-test-pro.vercel.app/test

1/5

4.0 Results & Conclusion

 Generate Conclusion



No conclusion generated yet

Click "Generate Conclusion" to create an IS 2911-compliant conclusion using AI

Load Increment Summary

| Phase   | Date       | Time     | Load (MT) | Pressure               | Avg Settlement | Remarks  |
|---------|------------|----------|-----------|------------------------|----------------|----------|
| LOADING | 08/12/2025 | 11:59 PM | 0.00      | 0 kg/cm <sup>2</sup>   | - mm           | Start    |
| LOADING | 09/12/2025 | 12:00 AM | 102.04    | 40 kg/cm <sup>2</sup>  | 0.06 mm        | -        |
| LOADING | 09/12/2025 | 12:15 AM | 102.04    | 40 kg/cm <sup>2</sup>  | 0.13 mm        | -        |
| LOADING | 09/12/2025 | 12:30 AM | 102.04    | 40 kg/cm <sup>2</sup>  | 0.17 mm        | -        |
| LOADING | 09/12/2025 | 12:45 AM | 102.04    | 40 kg/cm <sup>2</sup>  | 0.19 mm        | -        |
| LOADING | 09/12/2025 | 01:00 AM | 102.04    | 40 kg/cm <sup>2</sup>  | 0.21 mm        | -        |
| LOADING | 09/12/2025 | 01:01 AM | 204.08    | 80 kg/cm <sup>2</sup>  | 0.41 mm        | -        |
| LOADING | 09/12/2025 | 01:15 AM | 204.08    | 80 kg/cm <sup>2</sup>  | 0.29 mm        | -        |
| LOADING | 09/12/2025 | 01:30 AM | 204.08    | 80 kg/cm <sup>2</sup>  | 0.43 mm        | -        |
| LOADING | 09/12/2025 | 01:45 AM | 204.08    | 80 kg/cm <sup>2</sup>  | 0.47 mm        | -        |
| LOADING | 09/12/2025 | 02:00 AM | 204.08    | 80 kg/cm <sup>2</sup>  | 0.52 mm        | -        |
| LOADING | 09/12/2025 | 02:01 AM | 306.12    | 120 kg/cm <sup>2</sup> | 0.77 mm        | -        |
| LOADING | 09/12/2025 | 02:15 AM | 306.12    | 120 kg/cm <sup>2</sup> | 0.81 mm        | -        |
| LOADING | 09/12/2025 | 02:30 AM | 306.12    | 120 kg/cm <sup>2</sup> | 0.83 mm        | -        |
| LOADING | 09/12/2025 | 02:45 AM | 306.12    | 120 kg/cm <sup>2</sup> | 0.86 mm        | -        |
| LOADING | 09/12/2025 | 03:00 AM | 306.12    | 120 kg/cm <sup>2</sup> | 0.89 mm        | -        |
| LOADING | 09/12/2025 | 03:01 AM | 408.16    | 160 kg/cm <sup>2</sup> | 1.25 mm        | -        |
| LOADING | 09/12/2025 | 03:15 AM | 408.16    | 160 kg/cm <sup>2</sup> | 1.28 mm        | -        |
| LOADING | 09/12/2025 | 03:30 AM | 408.16    | 160 kg/cm <sup>2</sup> | 1.31 mm        | -        |
| LOADING | 09/12/2025 | 03:45 AM | 408.16    | 160 kg/cm <sup>2</sup> | 1.08 mm        | -        |
| LOADING | 09/12/2025 | 04:00 AM | 408.16    | 160 kg/cm <sup>2</sup> | 1.24 mm        | override |
| LOADING | 09/12/2025 | 04:01 AM | 510.20    | 200 kg/cm <sup>2</sup> | 1.51 mm        | -        |
| LOADING | 09/12/2025 | 04:15 AM | 510.20    | 200 kg/cm <sup>2</sup> | 1.50 mm        | -        |
| LOADING | 09/12/2025 | 04:30 AM | 510.20    | 200 kg/cm <sup>2</sup> | 1.53 mm        | -        |
| LOADING | 09/12/2025 | 04:45 AM | 510.20    | 200 kg/cm <sup>2</sup> | 1.56 mm        | -        |

| Phase   | Date       | Time     | Load (MT) | Pressure               | Avg Settlement | Remarks |
|---------|------------|----------|-----------|------------------------|----------------|---------|
| LOADING | 09/12/2025 | 05:00 AM | 510.20    | 200 kg/cm <sup>2</sup> | 1.59 mm        | -       |
| LOADING | 09/12/2025 | 05:01 AM | 612.24    | 240 kg/cm <sup>2</sup> | 2.08 mm        | -       |
| LOADING | 09/12/2025 | 05:15 AM | 612.24    | 240 kg/cm <sup>2</sup> | 2.11 mm        | -       |
| LOADING | 09/12/2025 | 05:30 AM | 612.24    | 240 kg/cm <sup>2</sup> | 2.13 mm        | -       |
| LOADING | 09/12/2025 | 05:45 AM | 612.24    | 240 kg/cm <sup>2</sup> | 2.13 mm        | -       |
| LOADING | 09/12/2025 | 06:00 AM | 612.24    | 240 kg/cm <sup>2</sup> | 2.16 mm        | -       |
| LOADING | 09/12/2025 | 06:01 AM | 714.28    | 280 kg/cm <sup>2</sup> | 2.66 mm        | -       |
| LOADING | 09/12/2025 | 06:15 AM | 714.28    | 280 kg/cm <sup>2</sup> | 2.66 mm        | -       |
| LOADING | 09/12/2025 | 06:30 AM | 714.28    | 280 kg/cm <sup>2</sup> | 2.67 mm        | -       |
| LOADING | 09/12/2025 | 06:45 AM | 714.28    | 280 kg/cm <sup>2</sup> | 2.68 mm        | -       |
| LOADING | 09/12/2025 | 07:00 AM | 714.28    | 280 kg/cm <sup>2</sup> | 2.68 mm        | -       |
| LOADING | 09/12/2025 | 07:01 AM | 816.32    | 320 kg/cm <sup>2</sup> | 3.30 mm        | -       |
| LOADING | 09/12/2025 | 07:15 AM | 816.32    | 320 kg/cm <sup>2</sup> | 3.33 mm        | -       |
| LOADING | 09/12/2025 | 07:30 AM | 816.32    | 320 kg/cm <sup>2</sup> | 3.35 mm        | -       |
| LOADING | 09/12/2025 | 07:45 AM | 816.32    | 320 kg/cm <sup>2</sup> | 3.38 mm        | -       |
| LOADING | 09/12/2025 | 08:00 AM | 816.32    | 320 kg/cm <sup>2</sup> | 3.40 mm        | -       |
| LOADING | 09/12/2025 | 08:01 AM | 918.36    | 360 kg/cm <sup>2</sup> | 4.18 mm        | -       |
| LOADING | 09/12/2025 | 08:15 AM | 918.36    | 360 kg/cm <sup>2</sup> | 4.20 mm        | -       |
| LOADING | 09/12/2025 | 08:30 AM | 918.36    | 360 kg/cm <sup>2</sup> | 4.23 mm        | -       |
| LOADING | 09/12/2025 | 08:45 AM | 918.36    | 360 kg/cm <sup>2</sup> | 4.27 mm        | -       |
| LOADING | 09/12/2025 | 09:00 AM | 918.36    | 360 kg/cm <sup>2</sup> | 4.30 mm        | -       |
| LOADING | 09/12/2025 | 09:01 AM | 1020.40   | 400 kg/cm <sup>2</sup> | 4.95 mm        | -       |
| LOADING | 09/12/2025 | 09:15 AM | 1020.40   | 400 kg/cm <sup>2</sup> | 5.00 mm        | -       |
| LOADING | 09/12/2025 | 09:30 AM | 1020.40   | 400 kg/cm <sup>2</sup> | 5.03 mm        | -       |
| LOADING | 09/12/2025 | 09:45 AM | 1020.40   | 400 kg/cm <sup>2</sup> | 5.06 mm        | -       |
| LOADING | 09/12/2025 | 10:00 AM | 1020.40   | 400 kg/cm <sup>2</sup> | 5.08 mm        | -       |
| LOADING | 09/12/2025 | 10:01 AM | 1071.42   | 420 kg/cm <sup>2</sup> | 5.36 mm        | -       |
| HOLDING | 09/12/2025 | 11:00 AM | 1071.42   | 420 kg/cm <sup>2</sup> | 5.40 mm        | -       |
| HOLDING | 09/12/2025 | 12:00 PM | 1071.42   | 420 kg/cm <sup>2</sup> | 5.44 mm        | -       |
| HOLDING | 09/12/2025 | 01:00 PM | 1071.42   | 420 kg/cm <sup>2</sup> | 5.50 mm        | -       |
| HOLDING | 09/12/2025 | 02:00 PM | 1071.42   | 420 kg/cm <sup>2</sup> | 5.53 mm        | -       |
| HOLDING | 09/12/2025 | 03:00 PM | 1071.42   | 420 kg/cm <sup>2</sup> | 5.58 mm        | -       |

| Phase     | Date       | Time     | Load (MT) | Pressure               | Avg Settlement | Remarks |
|-----------|------------|----------|-----------|------------------------|----------------|---------|
| HOLDING   | 09/12/2025 | 04:00 PM | 1071.42   | 420 kg/cm <sup>2</sup> | 5.60 mm        | -       |
| HOLDING   | 09/12/2025 | 05:00 PM | 1071.42   | 420 kg/cm <sup>2</sup> | 5.62 mm        | -       |
| HOLDING   | 09/12/2025 | 06:00 PM | 1071.42   | 420 kg/cm <sup>2</sup> | 5.66 mm        | -       |
| HOLDING   | 09/12/2025 | 07:00 PM | 1071.42   | 420 kg/cm <sup>2</sup> | 5.67 mm        | -       |
| HOLDING   | 09/12/2025 | 08:00 PM | 1071.42   | 420 kg/cm <sup>2</sup> | 5.68 mm        | -       |
| HOLDING   | 09/12/2025 | 09:00 PM | 1071.42   | 420 kg/cm <sup>2</sup> | 5.74 mm        | -       |
| HOLDING   | 09/12/2025 | 10:00 PM | 1071.42   | 420 kg/cm <sup>2</sup> | 5.79 mm        | -       |
| HOLDING   | 09/12/2025 | 11:00 PM | 1071.42   | 420 kg/cm <sup>2</sup> | 6.14 mm        | -       |
| HOLDING   | 10/12/2025 | 12:00 AM | 1071.42   | 420 kg/cm <sup>2</sup> | 6.63 mm        | -       |
| HOLDING   | 10/12/2025 | 01:00 AM | 1071.42   | 420 kg/cm <sup>2</sup> | 6.86 mm        | -       |
| HOLDING   | 10/12/2025 | 02:00 AM | 1071.42   | 420 kg/cm <sup>2</sup> | 6.95 mm        | -       |
| HOLDING   | 10/12/2025 | 03:00 AM | 1071.42   | 420 kg/cm <sup>2</sup> | 7.00 mm        | -       |
| HOLDING   | 10/12/2025 | 04:00 AM | 1071.42   | 420 kg/cm <sup>2</sup> | 7.12 mm        | -       |
| HOLDING   | 10/12/2025 | 05:00 AM | 1071.42   | 420 kg/cm <sup>2</sup> | 7.17 mm        | -       |
| HOLDING   | 10/12/2025 | 06:00 AM | 1071.42   | 420 kg/cm <sup>2</sup> | 7.19 mm        | -       |
| HOLDING   | 10/12/2025 | 07:00 AM | 1071.42   | 420 kg/cm <sup>2</sup> | 7.21 mm        | -       |
| HOLDING   | 10/12/2025 | 08:00 AM | 1071.42   | 420 kg/cm <sup>2</sup> | 7.22 mm        | -       |
| HOLDING   | 10/12/2025 | 09:00 AM | 1071.42   | 420 kg/cm <sup>2</sup> | 7.22 mm        | -       |
| HOLDING   | 10/12/2025 | 10:00 AM | 1071.42   | 420 kg/cm <sup>2</sup> | 7.22 mm        | -       |
| UNLOADING | 10/12/2025 | 10:01 AM | 1020.40   | 400 kg/cm <sup>2</sup> | 7.18 mm        | -       |
| UNLOADING | 10/12/2025 | 10:05 AM | 1020.40   | 400 kg/cm <sup>2</sup> | 7.18 mm        | -       |
| UNLOADING | 10/12/2025 | 10:15 AM | 1020.40   | 400 kg/cm <sup>2</sup> | 7.19 mm        | -       |
| UNLOADING | 10/12/2025 | 10:16 AM | 918.36    | 360 kg/cm <sup>2</sup> | 7.10 mm        | -       |
| UNLOADING | 10/12/2025 | 10:20 AM | 918.36    | 360 kg/cm <sup>2</sup> | 7.06 mm        | -       |
| UNLOADING | 10/12/2025 | 10:30 AM | 918.36    | 360 kg/cm <sup>2</sup> | 7.04 mm        | -       |
| UNLOADING | 10/12/2025 | 10:31 AM | 816.32    | 320 kg/cm <sup>2</sup> | 6.87 mm        | -       |
| UNLOADING | 10/12/2025 | 10:35 AM | 816.32    | 320 kg/cm <sup>2</sup> | 6.85 mm        | -       |
| UNLOADING | 10/12/2025 | 10:45 AM | 816.32    | 320 kg/cm <sup>2</sup> | 6.85 mm        | -       |
| UNLOADING | 10/12/2025 | 10:46 AM | 714.24    | 280 kg/cm <sup>2</sup> | 6.66 mm        | -       |
| UNLOADING | 10/12/2025 | 10:50 AM | 714.24    | 280 kg/cm <sup>2</sup> | 6.64 mm        | -       |
| UNLOADING | 10/12/2025 | 11:00 AM | 714.24    | 280 kg/cm <sup>2</sup> | 6.63 mm        | -       |
| UNLOADING | 10/12/2025 | 11:01 AM | 612.24    | 240 kg/cm <sup>2</sup> | 6.42 mm        | -       |

| Phase     | Date       | Time     | Load (MT) | Pressure               | Avg Settlement | Remarks |
|-----------|------------|----------|-----------|------------------------|----------------|---------|
| UNLOADING | 10/12/2025 | 11:05 AM | 612.24    | 240 kg/cm <sup>2</sup> | 6.37 mm        | -       |
| UNLOADING | 10/12/2025 | 11:15 AM | 612.24    | 240 kg/cm <sup>2</sup> | 6.35 mm        | -       |
| UNLOADING | 10/12/2025 | 11:16 AM | 510.20    | 200 kg/cm <sup>2</sup> | 6.14 mm        | -       |
| UNLOADING | 10/12/2025 | 11:20 AM | 510.20    | 200 kg/cm <sup>2</sup> | 6.13 mm        | -       |
| UNLOADING | 10/12/2025 | 11:30 AM | 510.20    | 200 kg/cm <sup>2</sup> | 6.13 mm        | -       |
| UNLOADING | 10/12/2025 | 11:31 AM | 402.16    | 160 kg/cm <sup>2</sup> | 5.89 mm        | -       |
| UNLOADING | 10/12/2025 | 11:35 AM | 402.16    | 160 kg/cm <sup>2</sup> | 5.87 mm        | -       |
| UNLOADING | 10/12/2025 | 11:45 AM | 402.16    | 160 kg/cm <sup>2</sup> | 5.84 mm        | -       |
| UNLOADING | 10/12/2025 | 11:46 AM | 306.12    | 120 kg/cm <sup>2</sup> | 5.58 mm        | -       |
| UNLOADING | 10/12/2025 | 11:50 AM | 306.12    | 120 kg/cm <sup>2</sup> | 5.54 mm        | -       |
| UNLOADING | 10/12/2025 | 12:00 PM | 306.12    | 120 kg/cm <sup>2</sup> | 5.51 mm        | -       |
| UNLOADING | 10/12/2025 | 12:01 PM | 204.08    | 80 kg/cm <sup>2</sup>  | 5.25 mm        | -       |
| UNLOADING | 10/12/2025 | 12:05 PM | 204.08    | 80 kg/cm <sup>2</sup>  | 5.21 mm        | -       |
| UNLOADING | 10/12/2025 | 12:15 PM | 204.08    | 80 kg/cm <sup>2</sup>  | 5.18 mm        | -       |
| UNLOADING | 10/12/2025 | 12:16 PM | 102.04    | 40 kg/cm <sup>2</sup>  | 4.89 mm        | -       |
| UNLOADING | 10/12/2025 | 12:20 PM | 102.04    | 40 kg/cm <sup>2</sup>  | 4.81 mm        | -       |
| UNLOADING | 10/12/2025 | 12:30 PM | 102.04    | 40 kg/cm <sup>2</sup>  | 4.80 mm        | -       |
| UNLOADING | 10/12/2025 | 12:31 PM | 0.00      | 0 kg/cm <sup>2</sup>   | 4.14 mm        | -       |
| UNLOADING | 10/12/2025 | 12:35 PM | 0.00      | 0 kg/cm <sup>2</sup>   | 4.10 mm        | -       |
| UNLOADING | 10/12/2025 | 12:45 PM | 0.00      | 0 kg/cm <sup>2</sup>   | 4.06 mm        | -       |